

Fireplace Pilot Light — Turning Off and On



Before you begin:


- Make sure the wall switch is off
- Have a flash light and a vacuum cleaner at hand.
- Be prepared to lay on your stomach to adjust the pilot light.

The attached photos show only part of the dust and cobwebs you will find!

Pull down the grill work at the bottom of the fireplace.

To turn the pilot light off:


Diagram #3 below shows the **off/on gas switch** and is to the left of the controls shown on page 2 (large Diagram 5-8-11 & 7). Turn the gas line knob to the closed position. to shut off the flow of gas. The pilot light is now off.

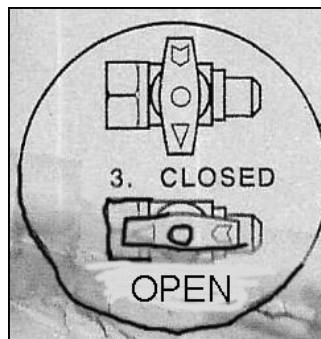

To Light the Pilot Light

Make sure the wall switch is "OFF". Turn the gas line to "OPEN" as in diagram 3 on page 1.

Note the pilot knob and the red arrow shown below. Turn the knob clockwise so that the word "pilot" is at the red arrow on the bottom of the knob. This allows the gas to flow.

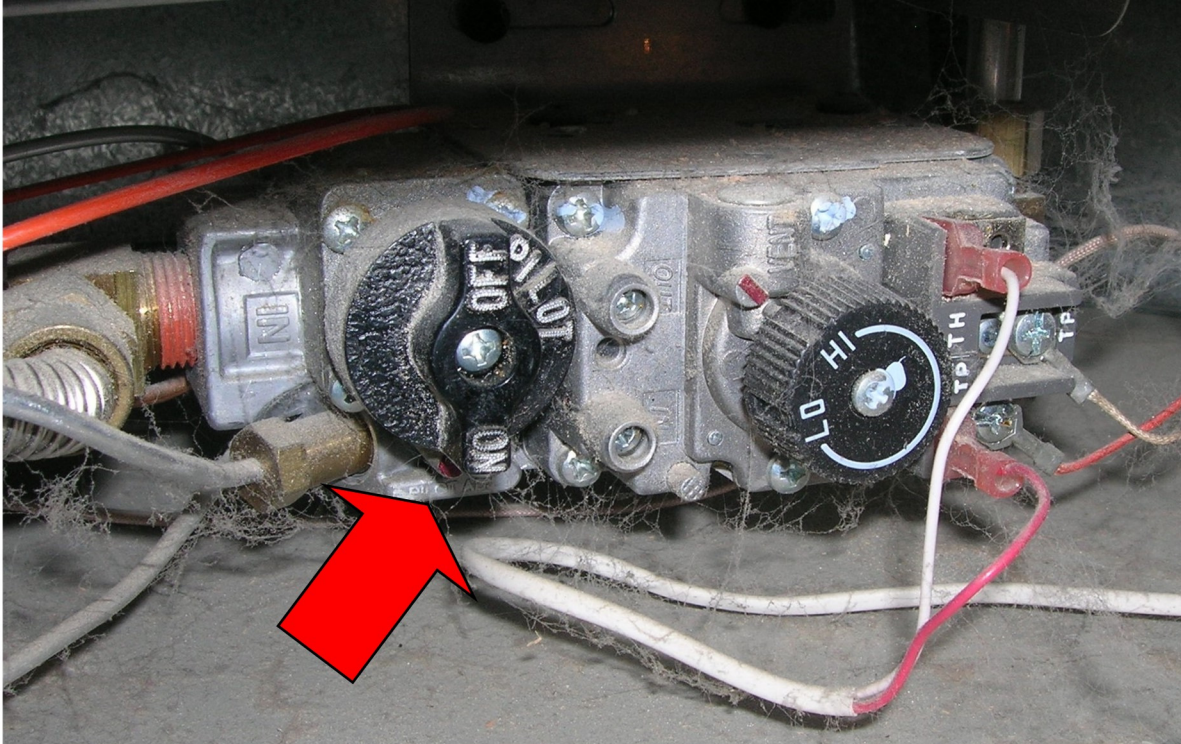


After turning the pilot knob, depress the pilot knob and hold for 30 seconds. At the same time **briefly** press the red igniter button #7 as shown below.

Once the pilot light is lit turn the Pilot knob counterclockwise to #11 (below) "ON".

If the pilot light goes out, wait 5 minutes and try again.

Stephen Hoffman (978-562-1242) has offered to assist anyone with problems at no charge.

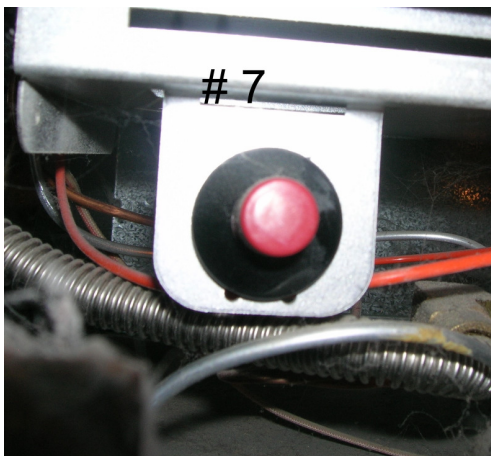

Fireplace Pilot Light

